


PrimoAire Contractor Accessories



24-Volt AC Power Adaptor

Finally A IAQ Monitor that can be mounted on the wall for Residential or Multi-family.

This adaptor allows the IAQ monitor to be mounted on wall, and use the existing central air & heat 24vac

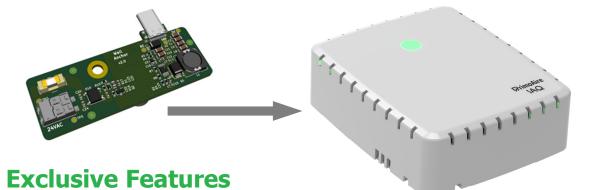

- Use standard 24volt AC transformer. ٠
- Use existing Central Air Conditioning & Heating thermostat 24 voltage.
- Allows IAQ Monitor to be mounted next or close to the any existing T-stat.
- Replaceable 3-amp fused protection. ٠
- Easily swap back to standard 115volt power adaptor in the Wall Monitor. ۲
- Integrates with PrimoAire Hublay to control most third party air quality devices.

SPECIFICATIONS

ELECTRICAL RATING

24vac (shared from t-stat)

DIMENSIONS

2.75" X 1.5" X .5"

WEIGHT

.50 oz

PROTECTION

3-amp replaceable fuse

STORAGE

-20 F to 130 F (-0 C to 54 C) 0% -90% RH non-condensing

OPERATING HUMIDITY

90% non-condensing max

OPERATING AMBIENT

5-Years part warranty

32 F to 105 F (-0 C to 41 C) WARRANTY

